

Premium Solid Wood Ready to Assemble Foundation Instructions



What's Included in the Box:

- 12 - 3.5" Carriage bolts
- 12 - Washers
- 12 - Wing nuts
- approx. 50-60 - Wood screws
- approx. 50-60 - Upholstery tacks
- 1 - Slat spacer (bundled with slats)

- 2 End rails
- 2 Side rails
- 1 Center rail
- 13-14 Wooden slats (depending on size)
- Foundation cover

Tools Required:

Drill or electric screwdriver with Phillips head bit (easier)

OR ...

Phillips head screwdriver (harder)

*** (Optional) wood staple gun with T-50 Staples ***



Unboxing:

Remove the components from the box and check the contents.

Assembly:

Assembly Time: 20 - 30 minutes

Weight: 50 - 85lbs

Assembly is possible with one person. However, two people are recommended.




Step 1 - Build Frame:

Connect the corners and center rail together by matching the corresponding letters.



Step 2 - Connect Corners and Center Support:

Insert the carriage bolts into the pre-drilled holes on each corner and center support rail.

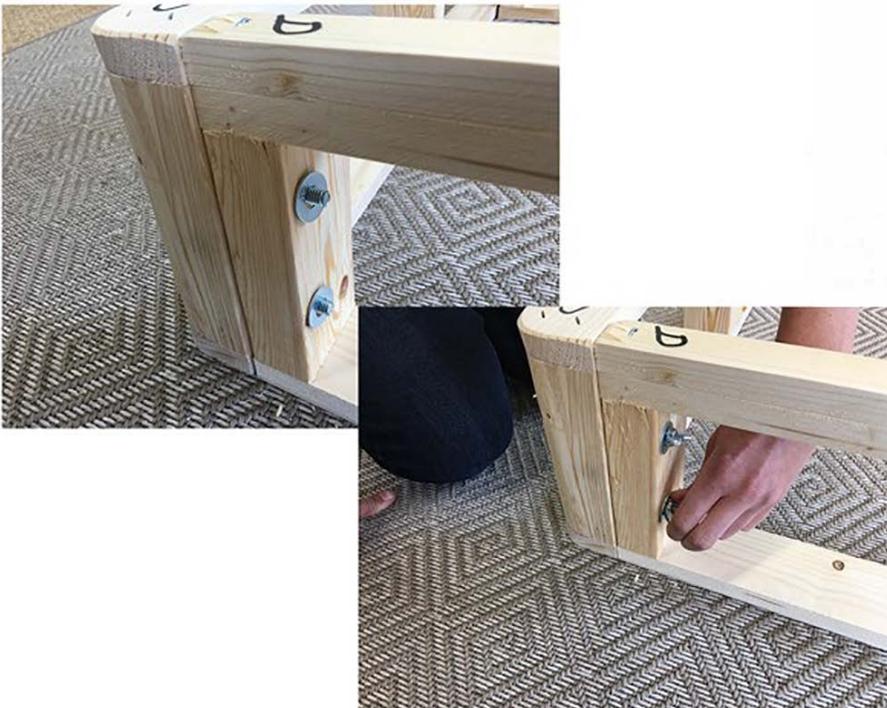

Step 3 - Add Washers:

Add washers to the other ends of the carriage bolts and attach them with wing nuts.



Step 4 - Completed Frame:

Your frame is completed and ready for the slats to be attached.



Step 5 - Space Slats:

Use the included "slat spacer" in between each slat to get the slats in place.



Step 6 - Attach Slats:

Use the wood screws provided and a Phillips head screwdriver or drill to attach slats to frame.

Use the pre-drilled pilot holes for the screws. There are a total of three screw holes per slat.

Place the slat pilot holes facing upward. Screw in both side rails first for accurate spacing. Screw center support beam last.



Step 7 - Completed Frame with Slats:

Your foundation is now ready to be covered.



Step 8 - Covering your Foundation:

Lay your cover out over your wood foundation like a fitted sheet with the tag facing outward. Stretch the cover as much as possible lining the tape edge of the cover with the edge of the foundation. Do NOT force stretching. You will be able to make it taut once flipped over.



Step 9 - Flip Foundation Over:

Once flipped over, pull the borders of the cover up as much as possible, aligning the tape edge with the edge of the foundation.

Step 10 - Attach Cover to Frame:



Use the provided upholstery tacks to attach the cover to frame. Start at the corners and use 3-4 tacks per corner.

*** Optional staple gun can be used in place of tack method. ***

Space the tacks or staples 6-8" apart around the border of the frame.

Step 11 - Completed Foundation



Once completed your new foundation will be ready to place on your bed, frame, or on the floor.

Note about Bed Legs


If optional bed legs were purchased, install after step 12 has been completed. Refer to separate bed leg instructions.





Bedleg and Bracket Installation Instructions




IMPORTANT: Verify that your side rails meet the minimum requirements of a width of no less than 2 1/4". We recommend the boxspring side and center rails be of high quality kiln dried wood of 1" x 4" (actual size of 3/4" x 3 1/4").

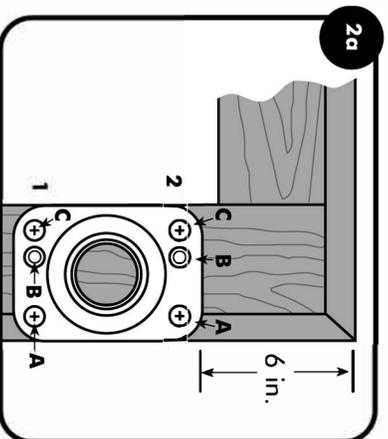


Before drilling, pick the set of screw holes you will use by measuring the width of your boxspring rail. If your rails are an actual width of 3/4" x 3 1/4", use the outside holes [C]. The side with the single set of holes [A] always faces the outside edge of the bedframe. If your rails are less than an actual width of 3/4" x 3 1/4", use the inside set of screw holes [B]. Always use the outside screw holes [A].

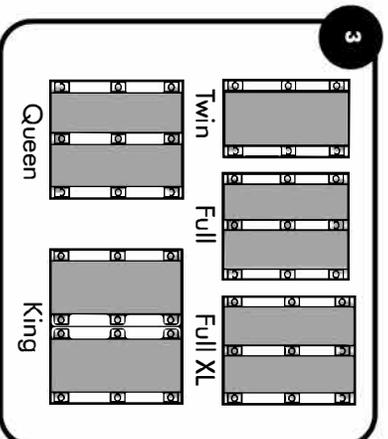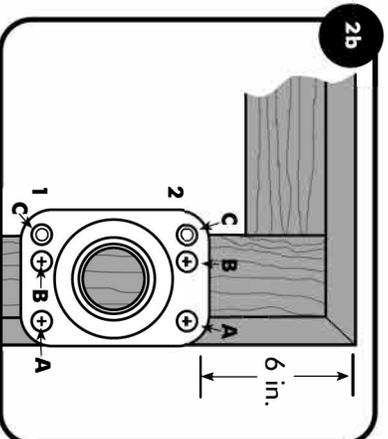


Using the above diagram, determine the number and placement of the Bedlegs for your bed size.

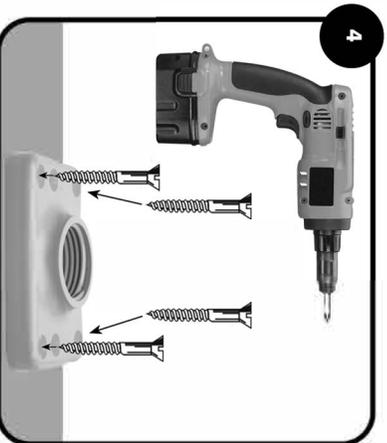


Using a power screwdriver, mount the plate to the boxspring using the supplied hardware. **Use only 4 screws per plate.**

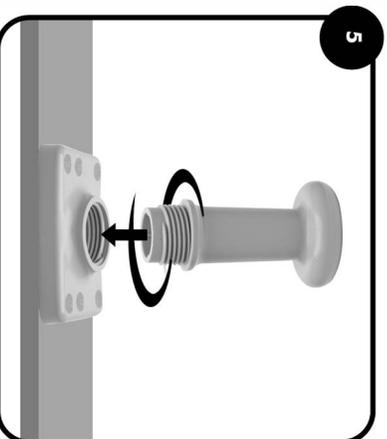

Hand twist the threaded leg stem into the base plate.

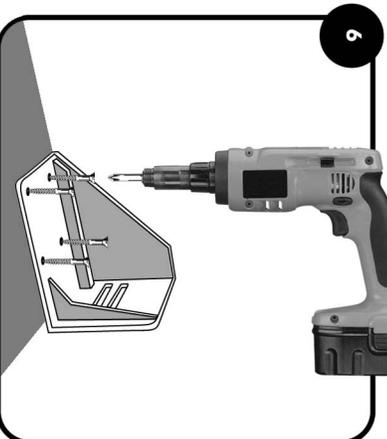

Universal Bedlegs headboard brackets easily attach to most headboards. Using a power screwdriver, install the headboard bracket with the supplied hardware directly to the boxspring. **Use only 4 screws per plate.**

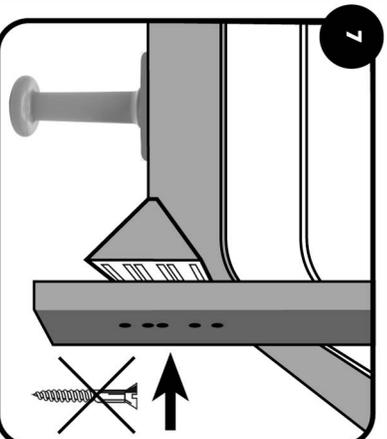

Complete installation, simply bolt the headboard onto the bracket. **Bolts are not provided to attach the headboard bracket to the headboard.**